


Solar Module: MyECO PM135 Series

PM120/PM125/PM130/PM135/PM140/PM145 (6" Polycrystalline Solar Cell, 4x9pcs)


Front View

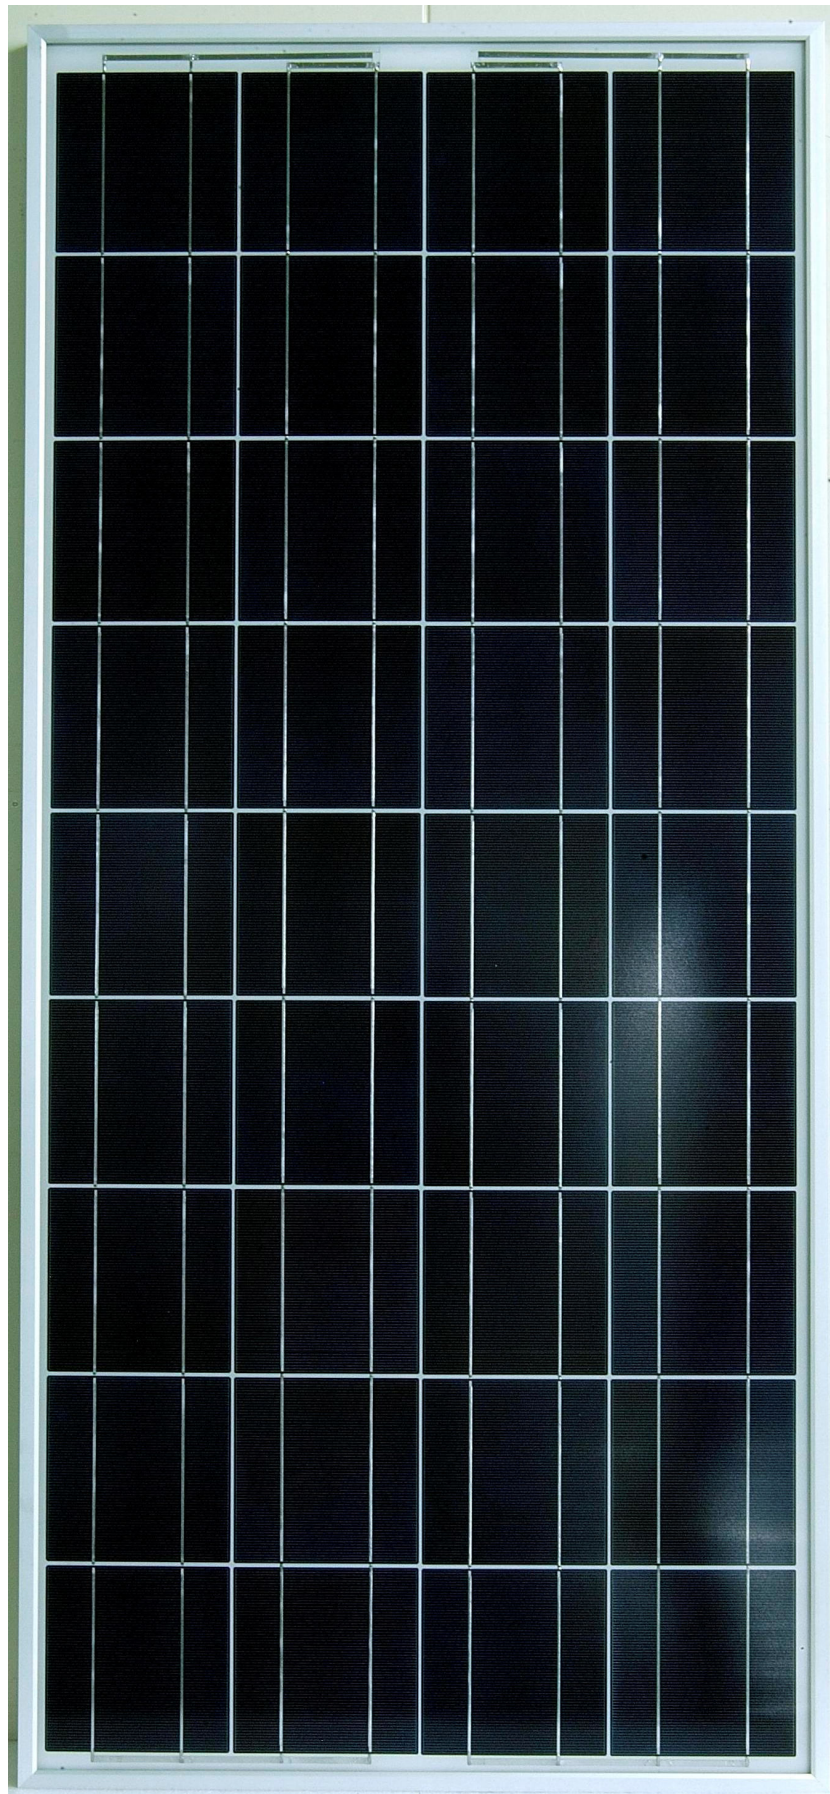

IEC 61215
EN 61730
Certificate N° 09-PPV-000260801-W01-TIC

For the sake of our planet earth,
please think again before you print.
Ver.3-1 03/2010



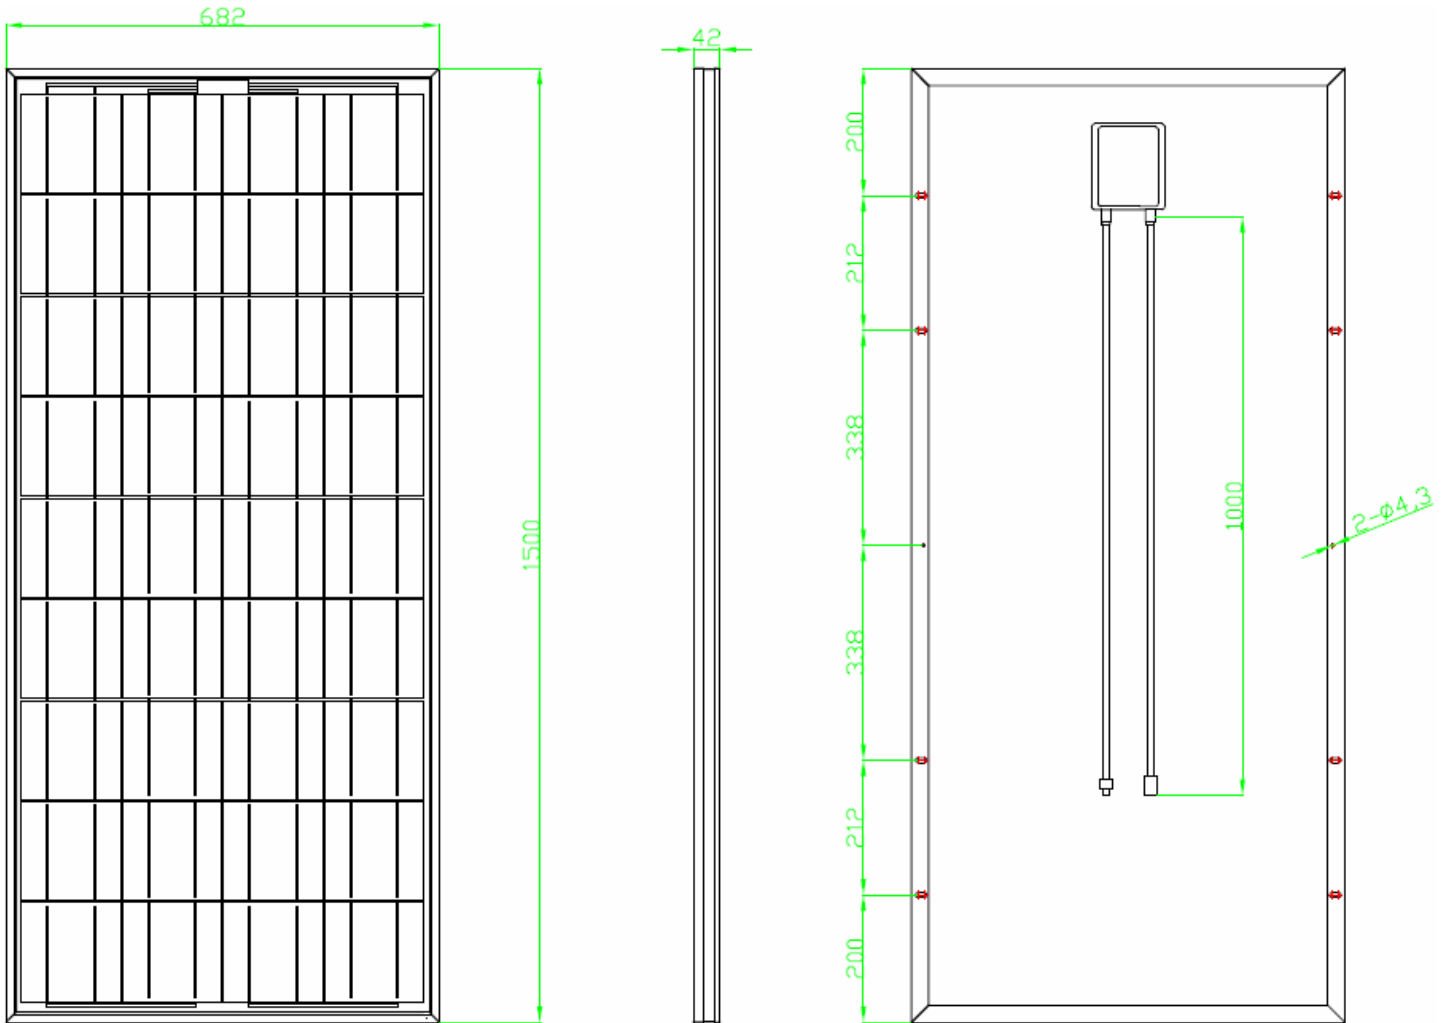

Product Characteristics

Electrical Characteristics: Performance at STC*1

Model Type	PM120	PM125	PM130 (CEC Listed)	PM135 (CEC Listed)
Nominal Peak Power, Pmax	120W ± 5%	125W ± 5%	130W ± 5%	135W ± 5%
Peak Power Voltage, Vpm	16.76 V	16.79 V	16.82 V	17.10 V
Peak Power Current, Ipm	7.11 A	7.45 A	7.63 A	7.81 A
Open Circuit Voltage, Voc	21.68 V	21.62 V	21.66 V	21.91 V
Short Circuit Current, Isc	7.64 A	8.00 A	8.19 A	8.38 A
Module Efficiency	11.73%	12.22%	12.71%	13.20%

*STC: Standard Test Condition, 1000W/m2, AM 1.5, 25°C

Electrical Characteristics: Performance at STC*1

Model Type	PM140 (CEC Listed)	PM145		
Nominal Peak Power, Pmax	140W ± 5%	145W ± 5%		
Peak Power Voltage, Vpm	17.40 V	17.57 V		
Peak Power Current, Ipm	7.98 A	8.23 A		
Open Circuit Voltage, Voc	22.19 V	22.30 V		
Short Circuit Current, Isc	8.53 A	8.79 A		
Module Efficiency	13.69%	14.17%		

*STC: Standard Test Condition, 1000W/m2, AM 1.5, 25°C


System Integration Parameter

Maximum System Voltage	1000VDC (600VDC in US)
Series Fuse Rating	10A
Operating Temperature	-40 to 85°C

Thermal Characteristics

NOCT (Nominal Operating Cell Temperature)	44.2°C
Temperature Coefficient TK Pmax (Peak Power)	-0.52%/°C
Temperature Coefficient TK Voc (Open Circuit Voltage)	-0.37%/°C
Temperature Coefficient TK Isc (Short Circuit Current)	+0.07%/°C

Current-Voltage Characteristics (I-V Curve) at various irradiance levels

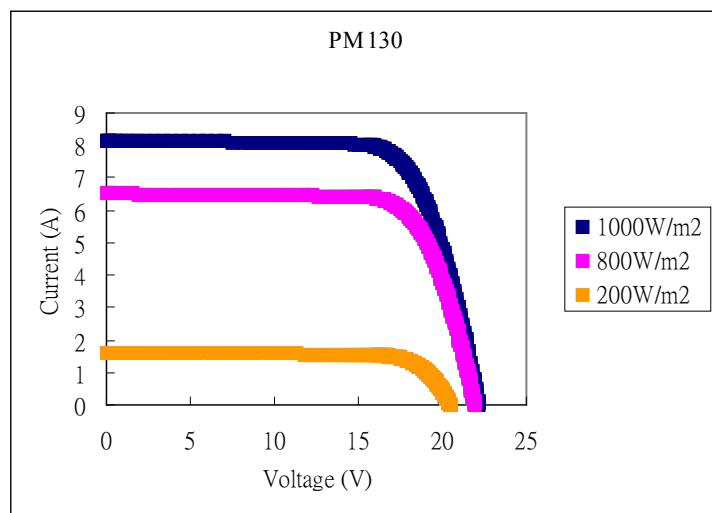

Component materials

Cell Qty per Module	36pcs
Cell Type	Polycrystalline Silicon
Cell Dimensions	156 x 156 mm
Laminate Construction	Front: Tempered Glass Encapsulation: Solar Cells Embedded in EVA (Ethylene-Vinyl-Acetate) Rear: Tedlar
Glass	Low-Iron Tempered Glass, 3.2mm (>3.2mm, ex. 4mm or above, custom-made possible)
Junction Box	IP65, TÜV Certified & UL Listed
Bypass Diodes	1pcs, TÜV Certified & UL Listed
Cable	TÜV Certified & UL Listed
Connector	TÜV Certified & UL Listed
Frame	Anodized Aluminum Frame. Color: Silver

Physical Specifications

Dimension [L x W x H]	1500 x 682 x 42 mm
Weight (Kg)	13 Kg

Packing Specifications

Modules Per Carton	2pcs/carton
Module Per Pallet	22/23pcs/pallet
20ft Container Capacity	484/506
40ft Container Capacity	1012/1058

Performance Warranty

90% Output	10Years
80% Output	20Years

Certification, Norm Passed, & Incentive

ISO 9001:2000 Quality Management	Certified
IEC 61215:2005	TÜV certified
EN 61730-1 & EN 61730-2:2007	TÜV certified
UL1703 Ed:3 Rev:2004	Certified according to UL safety standard
ULC/ORD-C1703-01 Second Edition	Certified according to Canadian safety standard
CEC Listing	http://www.gosolarcalifornia.ca.gov/equipment/pvmodule.html
IEC 61701 First Edition 1995.3	Passed & Complied with Salt Mist Corrosion Test standard

Quality Assurance

1. Electrical Insulation Test	2. Outdoor Exposure Test
3. Hot-Spot Endurance Test	4. UV-exposure
5. Thermal Cycling Test	6. Humidity Freeze Test
7. Damp Heat Test	8. Robustness of Terminations Test
9. Wet Leakage Current Test	10. Mechanical Load Test
11. Hail Impact Test	12. Bypass Diode Thermal Test

Features:

The most reliable quality

Good conversion efficiency of solar module (*efficiency to be affected by glass thickness & the color of back sheet)

Effectively minimize the power drop by the shade

High-level protection for severe environment

High quality glass provides for less reflection of incoming sunrays

Warranty of minimal power output 80% at STC for 20 years

Color of the back sheet: White & Black (custom-made possible)

Though the technical information has been carefully verified and corrected, error data could still be misplaced within. Above data will be subject to change without prior notice due to actual manufacturing condition and design. Please surf for the latest updates on Ritek websites, or contact us:

Headquarter, Taiwan: Ritek Corporation | www.ritek.com | www.riteksolar.com |
 No. 17, Kuang-Fu N. Rd., Hsin-Chu Industrial Park, Hu-Kou Township, Hsin-Chu County, 30351 Taiwan
 E-mail: ritsolar@ritek.com.tw

For Global Sales Contact: Tel: +886-3-5985696 Ext. 4011 & 4013

For Local Sales Contact in Taiwan: Tel: +886-3-5985696 Ext. 4020, 4021, & 4012

Fax: +886-3-5985249

US: Advanced Media, Inc. | www.ritekusa.com |

1440 Bridge Gate Dr., Suite 395, Diamond Bar, CA91765, USA

E-mail: solarsales@ritekusa.com

Tel: +1-909-861-2269

Fax: +1-909-612-4258

The Netherlands, Europe: Conrexx Technology B.V. (Ritek Europe) | www.conrexx.com | 
Keurmeesterstraat 18, 2984 BA Ridderkerk, The Netherlands
E-mail: solar@ritek-europe.com Tel: +31-180-44-16-66 Fax: +31-180-44-16-67

Germany, Europe: RME manufacturing GmbH (Ritek Germany) | www.riteksolar.com |
Glanstrasse 33, 66887 Rammelsbach, Germany
E-mail: solar@ritek-europe.com Tel: +49-6381-2212 Fax: +49-6381-3546

China: Kun-Shan RITEK Trading Co., Ltd | www.ritek.com.cn |
88, Second Avenue, Kun-Shan Export Processing Zone, Jiang-Su Province, 215301 China
E-mail: market@hutek.com.cn Tel: +86-512-57358989, Ext. 5566 & 5502 Fax: +86-512-57359090

MyECO and MyECO logo are registered trademarks and/or trademarks of Ritek Corporation. All other registered trademarks are the property/trademarks of their respective owner.